

UNIVERSITY OF BIRMINGHAM

Research at Birmingham

Laminated ceramics with elastic interfaces

Costa, Anna Karina F.; Kelly, Robert; Fleming, Garry J.p.; Borges, Alexandre Luiz S.; Addison, Owen

DOI:

[10.1016/j.jdent.2014.12.012](https://doi.org/10.1016/j.jdent.2014.12.012)

License:

Other (please specify with Rights Statement)

Document Version

Peer reviewed version

Citation for published version (Harvard):

Costa, AKF, Kelly, RD, Fleming, GJP, Borges, ALS & Addison, O 2015, 'Laminated ceramics with elastic interfaces: A mechanical advantage?', *Journal of Dentistry*, vol. 43, no. 3, pp. 335-341.
<https://doi.org/10.1016/j.jdent.2014.12.012>

[Link to publication on Research at Birmingham portal](#)

Publisher Rights Statement:

NOTICE: this is the author's version of a work that was accepted for publication in *Journal of Dentistry*. Changes resulting from the publishing process, such as peer review, editing, corrections, structural formatting, and other quality control mechanisms may not be reflected in this document. Changes may have been made to this work since it was submitted for publication. A definitive version was subsequently published in *Journal of Dentistry*, Vol 43, Issue 3, March 2015, DOI: 10.1016/j.jdent.2014.12.012.

Eligibility for repository checked March 2015

General rights

Unless a licence is specified above, all rights (including copyright and moral rights) in this document are retained by the authors and/or the copyright holders. The express permission of the copyright holder must be obtained for any use of this material other than for purposes permitted by law.

- Users may freely distribute the URL that is used to identify this publication.
- Users may download and/or print one copy of the publication from the University of Birmingham research portal for the purpose of private study or non-commercial research.
- User may use extracts from the document in line with the concept of 'fair dealing' under the Copyright, Designs and Patents Act 1988 (?)
- Users may not further distribute the material nor use it for the purposes of commercial gain.

Where a licence is displayed above, please note the terms and conditions of the licence govern your use of this document.

When citing, please reference the published version.

Take down policy


While the University of Birmingham exercises care and attention in making items available there are rare occasions when an item has been uploaded in error or has been deemed to be commercially or otherwise sensitive.

If you believe that this is the case for this document, please contact UBIRA@lists.bham.ac.uk providing details and we will remove access to the work immediately and investigate.

Accepted Manuscript

Title: Laminated ceramics with elastic interfaces: a mechanical advantage?

Author: Anna Karina F. Costa Robert D. Kelly Garry J.P.
Fleming Alexandre Luiz S. Borges Owen Addison

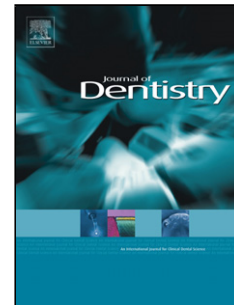

PII: S0300-5712(14)00352-2
DOI: <http://dx.doi.org/doi:10.1016/j.jdent.2014.12.012>
Reference: JJOD 2401

To appear in: *Journal of Dentistry*

Received date: 3-11-2014
Revised date: 15-12-2014
Accepted date: 18-12-2014

Please cite this article as: Costa AKF, Kelly RD, Fleming GJP, Borges ALS, Addison O, Laminated ceramics with elastic interfaces: a mechanical advantage?, *Journal of Dentistry* (2014), <http://dx.doi.org/10.1016/j.jdent.2014.12.012>

This is a PDF file of an unedited manuscript that has been accepted for publication. As a service to our customers we are providing this early version of the manuscript. The manuscript will undergo copyediting, typesetting, and review of the resulting proof before it is published in its final form. Please note that during the production process errors may be discovered which could affect the content, and all legal disclaimers that apply to the journal pertain.

Laminated ceramics with elastic interfaces: a mechanical advantage?

Anna Karina F. Costa^{1,2}, Robert D. Kelly¹, Garry J.P. Fleming³, Alexandre Luiz S. Borges²
and Owen Addison¹

¹Biomaterials Unit, University of Birmingham School of Dentistry, St. Chad's Queensway,
Birmingham B4 6NN, UK,

²Dental Materials and Prosthodontics Unit, Sao Jose dos Campos Dental School, Institute of
Technology and Science, SP, Brazil

³Materials Science Unit, Dublin Dental University Hospital, Lincoln Place, Dublin 2,
Republic of Ireland

Keywords: CAD/CAM, bi-axial flexure strength, fractography, elastic interface, lamination

Corresponding Author: Owen Addison,
Biomaterials Unit,
University of Birmingham School of Dentistry,
St. Chad's Queensway,
Birmingham,
United Kingdom.

Telephone: 00 44 121 466 5506

Fax 00 44 121 466 5491

E-Mail: addisono@adf.bham.ac.uk

ABSTRACT

Objectives: As CAD/CAM technologies improve we question whether adhesive lamination of ceramic materials could offer mechanical advantages over monolithic structures and improve clinical outcomes. The aim was to identify whether an adhesive interface (a chemically cured resin-cement) would influence the biaxial flexure strength (BFS) and slow-crack growth in a machinable dental ceramic.

Methods: Monolithic and adhesively laminated (with a chemically cured dimethacrylate resin-cement) feldspathic ceramic discs of identical dimensions were fabricated. BFS testing was performed on the Group A monolithic specimens (n=20), on Group B laminated specimens with the adhesive interface positioned below the neutral bending axis (n=20) and Group C laminated specimens with the adhesive interface positioned above the neutral bending axis (n=20). To study subcritical crack growth additional laminated specimens received controlled indentations and were exposed to thermo-mechanical fatigue. BFS data was analysed using parametric statistics ($\alpha=0.05$). Fractographic analyses were qualitatively assessed.

Results: No significant differences between the mean BFS data of Groups A and B were observed ($p=0.92$) but the mean BFS of Group C was slightly reduced ($p<0.01$). Lamination reduced the stiffness of the structure and fractographic analysis demonstrated that energy consuming crack deflection occurred. Thermo-mechanical fatigue caused subcritical extension of radial cracks associated with indentations adjacent to the adhesive interface. Crack growth was limited to parallel to the interface and was arrested or deflected in a direction normal to the interface.

Conclusions: Ceramic lamination increased the damage tolerance of the structure and could limit or arrest subcritical crack growth at regions near the 'interlayer'.

1. INTRODUCTION

Over the previous two decades there have been significant developments in Computer Aided Design/Computer Aided Manufacturing (CAD/CAM) technologies for dental applications which now enable the fabrication of restorations from a range of materials, to a high level of dimensional accuracy [1,2]. More recently, ceramic CAD/CAM systems that employ a digital workflow to independently design and manufacture different layers of a dental restoration before they are subsequently joined together using an interface adhesive have been introduced [3,4]. The development allowed for ceramic core-veneer restorations to be manufactured with favourable residual stressing patterns [3,4,5]. The approach also reduces operator induced variability associated with the manual build-up of the veneering ceramic layer [6,7]. However, as CAD/CAM technologies improve further the question arises as to whether ‘laminated structures consisting of multiple (possibly functionally graded) adhesively bonded ceramic layers could offer mechanical advantages that would improve clinical outcomes’?

The precedent for using adhesively laminated ceramics and glasses for structural purposes is widespread [8,9,10]. A large body of evidence from outside of the dental literature has demonstrated a modification of the mechanical properties of brittle materials when used in laminated structures such as thermal barrier coatings [11,12], architectural laminated glass [13] and automotive windscreens [14]. Researchers identified adhesive lamination changes the pattern of fracture when compared with monolithic structures of equal composition and dimensions [14,15]. Investigations on glass substrates identified adhesive lamination reduces the effective stiffness of the structure whilst maintaining, or in some cases improving, the

flexural strength [16]. The selection of interface material and laminate design can be tailored to modify the load bearing capacity of the particular system [17]. However, it has also been recognised that mechanical improvements can be unpredictable because of the brittle nature of the glass and the sensitivity to pre-existing defects and residual stress states [17]. A consequence of the interfaces created can be the inadvertent introduction of new strength limiting flaws which may be absent in the monolithic substrate but may ultimately determine the strength of the system [17].

If processing routes can be identified to minimise the introduction of strength limiting defects, it is possible to 'toughen' a ceramic or glass structure by laminating with a polymer adhesive interface [14]. Therefore, on application of an external load, the laminating adhesive ('interlayer') can absorb energy elastically [17] and allow shear transfer, thereby, transporting the location of the load-reaction away from the concentrated point of application [14]. In the event where a crack does propagate through the 'interlayer', strain generated in the adhesive in the crack wake can act as a crack-bridge and arrest further extension [10]. Subsequently if one laminate layer fails, others can retain some load bearing capacity to retain overall function [10]. The flexural stresses generated in the 'interlayer' remain small in comparison due to a substantially lower elasticity of the typical 'interlayer' materials when compared with the ceramic or glass laminates, [10].

The overall objective of the current study was to investigate the concept of introducing polymer adhesive interfaces into dental ceramic materials to create laminated structures. The specific aim was to identify whether an adhesive interface (a chemically cured resin-cement) would influence the biaxial flexure strength (BFS) and slow-crack growth in a machinable feldspathic dental ceramic. Given the lack of evidence in this subject area the null hypotheses

tested were that lamination would have no impact on both the BFS and the slow crack growth in a feldspathic dental ceramic.

Accepted Manuscript

2. MATERIALS AND METHODS

2.1 Preparation of ceramic discs

Feldspathic ceramic blocks (40/19 VITA Mark II – VITA, Bad Säckingen, Germany, LOT 36990) were rounded to a 15 mm diameter cylinder using a diamond impregnated core drill under copious water lubrication. The cylinders were sectioned to produce circular discs using a low-speed diamond impregnated saw (IsoMet Low Speed, Buehler, Illinois, USA) with water as a lubricant. The discs were manually polished on one surface using P120 silicon carbide abrasive paper followed by P500, P800, and P1200 (Struers, Glasgow, UK) to achieve final thicknesses of 1.50 ± 0.01 mm (n=20); 1.00 ± 0.03 mm (n=43) and 0.50 ± 0.02 mm (n=43) measured using a digital micrometer accurate to 10 μ m (Mitutoyo Corporation, Tokyo, Japan).

2.2 Preparation of ceramic samples for biaxial flexure strength (BFS) determination

Three different sample geometries were fabricated (Figure 1). The polished surface of each 1.0 mm and 0.5 mm ceramic discs was etched with 9.0 % hydrofluoric (HF) acid gel for 60 s (Ultradent Porcelain Etch, Ultradent Products, Cologne, Germany), thoroughly washed with water and allowed to air dry. The etched surface was silane coated (Ultradent Silane, Ultradent Products, Cologne, Germany) and allowed to air dry for 10 mins. Group A specimens were 1.5 mm thickness ceramic discs which received no HF acid gel or silane surface treatment. Group B specimens were fabricated by adhesively bonding the 1.0 mm ceramic discs on top of the 0.5 mm ceramic discs using a layer of chemically cured resin-cement (Panavia 21, Kuraray Co. Ltd., Tokyo, Japan). The chemically cured resin-cement was hand-mixed and applied to the centre of the silane primed surface of the 0.5 mm disc.

The silane primed surface of the 1.0 mm ceramic disc was then placed onto the resin-cement so that the two discs were aligned directly one above the other. The discs were then loaded on a flat surface with a constant weight of 100 g for 10 mins. Group C specimens were fabricated by resin-cementing the 0.5 mm discs onto the top of the 1.0 mm discs and loaded according to the protocol for Group B. For the layered specimens in both Groups B and C, the excess resin-cement that exuded from the interface was carefully removed from the specimen periphery immediately after loading.

2.2.1 Determination of BFS

BFS was determined in a ball-on-ring configuration at a room temperature (23 ± 1 °C) using a universal testing machine (Instron 5544 with a 2 kN load cell, Instron Ltd, Bucks, England) with a loading rate of 1 mm/min. The ceramic samples were positioned centrally on a thin rubber sheet placed on top of a 10 mm diameter ring-support. The upper surface of each sample was centrally loaded with a 4 mm diameter stainless steel spherical ball indenter. The load at failure, the number of fracture fragments and the specimen thickness of each fracture fragment were measured. The BFS was calculated according to Timoshenko and Woinowsky-Kriegers' analysis (Eq. 1) [18] (n=20 per group).

$$\sigma = \frac{P}{t^2} \left\{ (1 + \nu) \left[0.485 \ln \left(\frac{a}{t} \right) + 0.52 \right] + 0.48 \right\} \quad \text{Eq. 1}$$

where σ was the maximum biaxial flexure stress; P the measured load to fracture; a the radius of the ring-edged support; t the specimen thickness and ν the Poisson's ratio where a value of 0.25 [19] was used for the ceramic investigated.

Group B specimens were loaded in accordance with Figure 1B with the 1.0 mm disc uppermost so that the adhesive interface was closest to the ring support and below the neutral axis of bending (in tension). Group C specimens were loaded with the 0.5 mm disc uppermost so that so that the adhesive interface was closest to loading contact and above the neutral axis of bending (in compression) (Figure 1C).

2.2.2 Fractography

Fracture fragments derived from BFS testing were gold sputtered and imaged using scanning electron microscopy (SEM) (Zeiss EVO, Carl Zeiss GmbH, Jena, Germany) under high vacuum at operating voltages between 5 and 20 kV. The fracture surfaces were studied qualitatively at a range of magnifications to provide insight into the location of the fracture origin and the sequence of fracture events.

2.3 Qualitative measurement of crack extension in the region of ceramic-adhesive interfaces.

The remaining three untested laminate specimens were sectioned perpendicular to the resin cement interface using a diamond impregnated saw under water lubrication (IsoMet low speed saw, Buehler, Illinois, USA) to create semi-circular shaped specimens. The cut surfaces were gently sequentially polished using P4000 silicon carbide abrasive paper (Struers, Glasgow, UK) and a porous neoprene cloth (MD-Chem, Struers, Denmark) in combination with 0.04 μm colloidal silica abrasive suspension (OP-S Suspension, Struers, Denmark). The specimens were mounted in a stainless steel block so that the polished surface was horizontal and using the x40 objective of the microscope of a hardness indenter (Duramin, Struers, UK) to aid positioning, a series of Vickers indentations (10-20 μm) were created parallel to the adhesive interface with an indentation load of 1.961 N applied over 20 s. The indents were separated by a distance of 30-50 μm . SEM was then undertaken to visualise the location and

proximity of each indent and associated cracks to the resin-ceramic interface prior to thermo-mechanical fatigue.

2.3.1 Thermo-mechanical fatigue

Following indentation the specimens were subjected to thermo-mechanical fatigue to study crack-extension in the proximity of the adhesive interface. Specimens were thermocycled in water between 4 ± 1 and $65 \pm 1^\circ\text{C}$, for 10,000 cycles with a dwell time of 5 s and a transfer time of 3 s. Temperatures were chosen to represent the most extreme temperatures that may be encountered in the oral environment [20,21]. Subsequently, the test specimens were positioned such that the adhesive interface was parallel to the loading platen. The specimens were cyclically loaded on the upper surface (approximately central within the semi-circular specimen) for 30,000 cycles loading and unloading between 0 and 20 N at 1 mm/min using the universal testing apparatus (Instron 5544 with a 100 N load cell, Instron Ltd, Bucks, England). A 4 mm diameter stainless steel spherical ball indenter was used to apply the load and the specimen surface was protected using a thin rubber sheet to obviate any discrepancy in the flatness of the specimen or supporting surface and orientation. Following cyclic loading the specimens were subjected to a further 15,000 thermal cycles (4 to 65°C , 5 s dwell time, 3 s transfer time). SEM was conducted to capture images of the identical indents before and after the artificial fatigue process.

2.4 Statistical analysis

Comparisons of group means (Group A-C) were made utilising a one-way analysis of variance (ANOVA) and a post-hoc Tukey's multiple range test ($\alpha=0.05$). Survival probability curves were examined to assess the distribution of flexure strengths values. Slow crack extension adjacent to adhesive interfaces was qualitatively assessed.

3. RESULTS

The one-way ANOVA identified a significant difference between the mean BFS data of Groups A-C ($p=0.003$, $\beta=91\%$) (Table 1). Post-hoc Tukey tests identified Group C specimens which possessed an adhesive interface above the neutral axis of bending during BFS testing, exhibited a significantly lower BFS when compared with Group A ($p=0.01$) and Group B ($p<0.01$) specimens. There was no significant difference in the mean BFS of the monolithic specimens (Group A) and adhesively bonded specimens when the adhesive interface was positioned below the neutral axis of bending (Group B) during BFS determination ($p=0.92$). A similar distribution of the BFS data was observed for all three groups in the survival probability distributions (Figure 2). Plotting the mean load during testing against the deflection derived from the BFS test identified that load-deflection curve for the Group A monolithic specimens was steeper than those of Groups B and C which were coincident with each other (Figure 3). For an equivalent peak load, Group B and Group C specimens possessing an adhesive interface demonstrated a significantly increased deflection on loading. In addition, Group B and Group C specimens demonstrated similar numbers of fracture fragments following BFS testing with an increase in the number of fracture fragments observed for Group A specimens.

Fractography of the fracture fragments generated during BFS testing demonstrated that in all cases failure originated at the lower-most surface (Figure 4) of the test specimens (in-contact with the loading ring). Porosity was observed in the interface layer in the fracture plane for a number of specimens (Figure 4b and 4c) but could not be identified to be associated with fracture initiation. The fracture direction was observed to be modified by the presence of the

resin-cement interface to varying extents and high strength specimens were generally associated with greater deflection in the crack direction (Figure 4d).

The introduction of indentations adjacent to the ceramic-resin interface resulted in the generation of median/radial cracks within the ceramic that were approximately parallel and normal to the adhesive-ceramic interface (Figure 5). On indentation, the crack lengths were longer in a direction parallel to the interface compared with cracks normal to the interface which appeared to have been arrested when they encountered the resin-cement (Figure 5a and c). Following thermo-mechanical fatigue, the cracks parallel to the adhesive interface were observed to increase in length often joining up with cracks from adjacent indents of 20 - 30 μm distance apart. No crack extension was observed in cracks normal to the interface through the 'interlayer' itself (Figure 5b and d). A modification in crack direction was observed when cracks originally normal to the resin-cement interface extended with a tendency towards growth in a direction parallel to the interface. No delamination of the interface was observed following thermo-mechanical fatigue.

4. DISCUSSION

The introduction of an adhesive interface to create a laminated ceramic bilayer reduced the effective stiffness of the ceramic structure (Figure 3) but resulted in no significant strengthening when subjected to monotonic BFS testing. The mechanical response is consistent with other structural systems such as laminated safety glass where equivalent strengths to monolithic glass structures can be achieved [22]. However, it has been demonstrated elsewhere that the strength of a brittle laminate is highly sensitive to the elastic and viscoelasticity properties of the adhesive ‘interlayer’ which was not systematically considered in the current study [22].

A reduction in the stiffness of the ceramic structure through lamination as evident in the load-deflection plots (Figure 3) may offer a mechanical advantage when the ceramic is subjected to loading in the oral environment. The load-deflection data indirectly demonstrates a ‘toughening’ effect of lamination implying an increased energy requirement to cause fracture. The reduction in the number of fracture fragments generated during BFS testing of the laminated structures suggests reduced energy storage in the ceramic bulk (instead translated into elastic strain in the ‘interlayer’) prior to failure [23]. Additionally fractographic analyses identified that the adhesive interface can mediate crack deflection which has an increased energetic requirement and was more pronounced in ‘high strength’ specimens measured during BFS testing (Figure 5d) compared with ‘lower strength’ counterparts (Figure 5c).

The mean BFS data and toughening effects are promising as they suggests a damage tolerant system. It is important to recognise that the adhesive interface was generated using an

existing adhesive system (chemically cured resin-cement) which is known to reliably bond to the etched and silane primed feldspathic ceramic surface [24]. The interface was not idealised and was shown to be susceptible to operator induced porosity. A small but significant strength reduction was observed in Group C specimens where the laminate was subjected to BFS testing with the adhesive interface positioned above the neutral axis of bending (Figure 1C). The mean load-deflection plot (Figure 3) was similar to that of Group B laminated specimens but this was a measure of deflection of the upper surface and is not indicative of equivalent strain at the lower surface in maximum tension. There will also have been a difference in the crack velocity when it reached the interface, namely the crack would be expected to be travelling faster in Group C specimens when compared with Group B specimens, thereby potentially mitigating the effect of the 'interlayer'.

Stable crack extension [25] of pre-existing defects in dental ceramic restorations usually precedes clinical failure [26]. In the current investigation, the effects of the presence of the adhesive layer on crack extension were studied by the introduction of controlled Vickers indentations into the ceramic - in close proximity to the 'interlayer'. Following indenter removal cracks form around the plastically deformed zone with some cracks extending radially outwards perpendicular to the surface [27]. At low indentation loads, such as those used in the current investigation, it would be expected that separate radial cracks would form and extend to their full length after load removal rather than 'halfpenny cracks' which constitute a single crack extending from one side of the indentation zone to the other [28]. Indents were introduced adjacent to the adhesive interface and orientated to create radial cracks both parallel and normal to the interface. Following indentation the radial cracks parallel to the adhesive interface were observed to be longer than cracks normal to the interface which appeared to be arrested. Importantly, cracks normal to the adhesive interface

but extending away were also of reduced length which suggested that a residual stress state exists in the ceramic adjacent to the 'interlayer'. Residual stresses could be attributed to the polishing process [29] but would be expected to affect both parallel and normal cracks or may be attributed to the resin-cement through polymerisation shrinkage stresses [29].

Following thermo-mechanical fatigue cracks were observed to extend considerably parallel to the adhesive interface but not extend through the interface itself. Although cracks normal to the adhesive interface did extend, the crack direction was observed to change to a more parallel path before or at the adhesive interface. The observed pattern of slow crack growth would be clinically favourable preventing crack extension in particular in a radial direction towards the restoration surface.

5. CONCLUSIONS

The current study has identified that lamination of a dental ceramic with a polymeric 'interlayer' could offer toughening effects which could potentially delay or arrest sub-critical crack growth at regions near the interlayer. Conceptually the generation of a multilayer laminate structure demonstrated for illustrative purposes in Figure 6, could increase the toughness of the ceramic structure further. The adoption of technological knowhow from other engineering disciplines to idealise interfaces, interlayer materials and processing routes could further enable the fabrication of more damage tolerant structures which would be of significant clinical benefit. While incorporation of functionally and aesthetically graded layers would be realisable, considerable research would be required before the feasibility of the conceptual approach could be accurately assessed. Today the technological requirements in CAD/CAM to generate such structures for dental applications are no longer unrealistic.

REFERENCES

1. Bosch G, Ender A, Mehl A. A 3-dimensional accuracy analysis of chairside CAD/CAM milling processes. *Journal of Prosthetic Dentistry*. 2014; **112**: 1425-1431
2. Miyazaki T, Hotta Y, Kunii J, Kuriyama S, Tamaki Y. A review of dental CAD/CAM: current status and future perspectives from 20 years of experience. *Dental Materials Journal*. 2009; **28**: 44-56.
3. Kurbad A. Digital veneering 2 –fabrication of CAD/CAM veneer structures with rapid layer technology. *International Journal of Computerised Dentistry*. 2011; **14**: 343–352
4. Wiedhahn K. The impression-free Cerec multilayer bridge with the CAD-on method *International Journal of Computerised Dentistry*. 2011; **14**: 33–45.
5. Costa AK, Borges AL, Fleming GJP, Addison O. The strength of sintered and adhesively bonded zirconia/veneer-ceramic bilayers. *Journal of Dentistry*. 2014; **42**: 1269-76.
6. Fleming GJP, Shaini FJ, Marquis PM. An assessment of the influence of mixing induced variability on the bi-axial flexure strength of dentine porcelain discs and the implications for laboratory testing of porcelain specimens. *Dental Materials*. 2000; **16**: 114-9.
7. Fleming GJP, Shelton RM, Marquis PM. The influence of clinically induced variability on the bi-axial fracture strength of aluminous core porcelain discs. *Journal of Dentistry*. 1999; **27**: 587-94.
8. Lawn BR, Denga Y, Miranda P, Pajares A, Chai H, Kim DK. Overview: Damage in brittle layer structures from concentrated loads. *Journal of Materials Science*. 2002; **17**: 3019–36.
9. Yadav S, Ravichandran G. Penetration resistance of laminated ceramic/polymer structures. *International Journal of Impact Engineering*. 2003; **28**: 557–574.

10. Veer FA, Vries S, Kranenburg C. Fracture control of Glass through Lamination. 2001. In: Proceedings of ICF 10, Elsevier Science, Oxford.
11. Tamura M, Takahashi M, Ishii J, Suzuki K, Sato M and Shimomura K. Multilayered Thermal Barrier Coating for Land-Based Gas Turbines. *Journal of Thermal Spray Technology*. 1999; **8**: 68-72.
12. Cao XQ, Vassenb R, Stoeverb D. Ceramic materials for thermal barrier coatings. *Journal of the European Ceramic Society*. 2004; **24**: 1–10.
13. Behr RA, Minor JE, Norville HS. Structural behavior of architectural Laminated glass. *Journal of Structural Engineering*. 1993; **119**: 202-222.
14. Norville HS, King KW, Swofford JL. Behavior and strength of laminated glass. *Journal of Engineering Mechanics*. 1998; **124**: 46-53.
15. Vallabhan CVG, Minor JE, Nagalla SR. Stresses in layered glass units and monolithic glass plates. *Journal of Structural Engineering*. 1987; **113**: 36-43.
16. Foraboschi P. Behavior and failure strength of laminated glass beams. *Journal of Engineering Mechanics ASCE*. 2007; **133**: 1290-1301.
17. Fam A, Rizkalla S. Structural performance of laminated and unlaminated tempered glass under monotonic transverse loading. *Construction Building Materials*. 2006; **20**: 761–768.
18. Timoshenko S, Woinowsky-Krieger S. Symmetrical Bending of Circular Plates. In: Timoshenko SP, editor. *Theory of Plates and Shells*. 2nd ed. New York: McGraw-Hill; 1959; p. 51–78.
19. Zeng K, Odén A, Rowcliffe D. Evaluation of mechanical properties of dental ceramic core materials in combination with porcelains. *International Journal of Prosthodontics*. 1998; **11**: 183-9.
20. Fleming GJP, Addison O, Marquis PM. The effect of thermocycling on the strength of porcelain laminate veneer materials. *Dental Materials*. 2003; **19**: 291-297.

21. Gale MS, Darvell BW, Thermal cycling procedures for laboratory testing of dental restorations, *Journal of Dentistry*. 1999; **27**: 89–99.
22. Bennison SJ, Jagota A, Smith CA. Fracture of Glass/Poly(vinyl butyral) (Butacite®) Laminates in Biaxial Flexure. *Journal of the American Ceramics Society*. 1999; **82**: 1761–1770.
23. Nakayama J. Direct Measurement of Fracture Energies of Brittle Heterogeneous Materials, *Journal of the American Ceramics Society*. 1965; **48**: 583–587.
24. Blatz MB, Sadan A, Kern M. Resin-ceramic bonding: a review of the literature. *Journal of Prosthetic Dentistry*. 2003; **89**: 268-74.
25. Wiederhorn SM, Bolz LH, Stress Corrosion and Static Fatigue of Glass. *Journal of the American Ceramics Society*. 1970; **53**: 543–548.
26. Gonzaga CC, Cesar PF, Miranda WG Jr, Yoshimura HN. Slow crack growth and reliability of dental ceramics. *Dental Materials*. 2011; **27**: 394-406.
27. Chen, X., Hutchinson, J. W., & Evans, A. G. The mechanics of indentation induced lateral cracking. *Journal of the American Ceramics Society*. 2005; **88**: 1233-1238.
28. Tang, Y., Yonezu, A., Ogasawara, N., Chiba, N., & Chen, X. On radial crack and half-penny crack induced by Vickers indentation. *Proceedings of the Royal Society of London. Series A: Mathematical, Physical and Engineering Sciences*. 2008; **464**: 2967-2984.
29. Isgró G, Addison O, Fleming GJ. Deformation of a dental ceramic following adhesive cementation. *Journal of Dental Research*. 2010; **89**: 87-90.

Figure 3. Plot of load (N) against deflection (mm) derived from BFS testing of Group A monolithic specimens, Group B specimens with the adhesive interface tested in tension and Group C specimens with an adhesive interface tested in compression. Plots represent the mean (and associated standard deviation) of the specimens tested for each group.



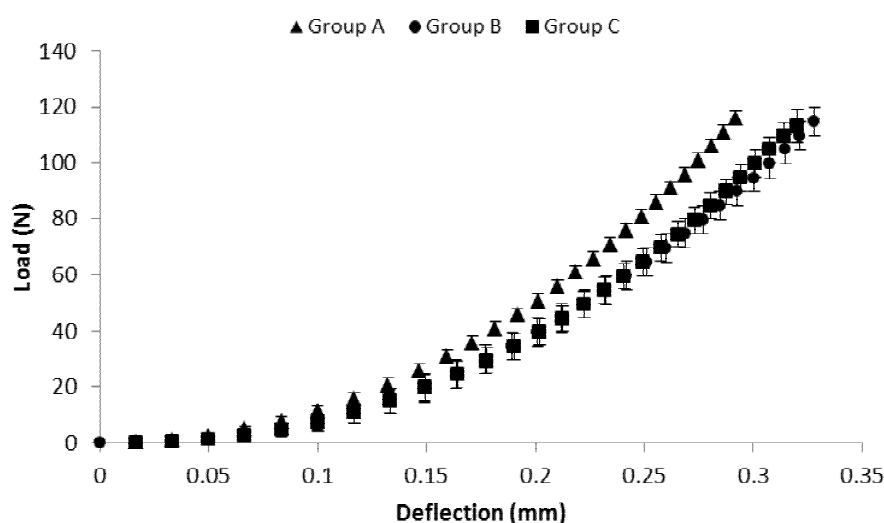


Figure 4. Scanning electron micrographs of fracture surfaces of the disc-shaped ceramic specimens following BFS testing. **(a)** demonstrates a monolithic specimen (Group A) with the fracture origin clearly evident at the lower surface. **(b)** is representative of a Group B specimen with the fracture origin again at the lower surface. Although porosity is present in the resin-cement adhesive no obvious effect on crack origin or crack direction was evident. **(c)** is illustrative of a low strength specimen from Group C. The fracture origin is situated on the lowermost surface almost vertically below the zone of contact loading. The fracture surface is not totally smooth in the transition across the adhesive interlayer suggesting a small degree of crack deflection. **(d)** In contrast a high strength specimen from Group C exhibits a clear change in the crack direction as it crosses the adhesive interlayer.


(a)

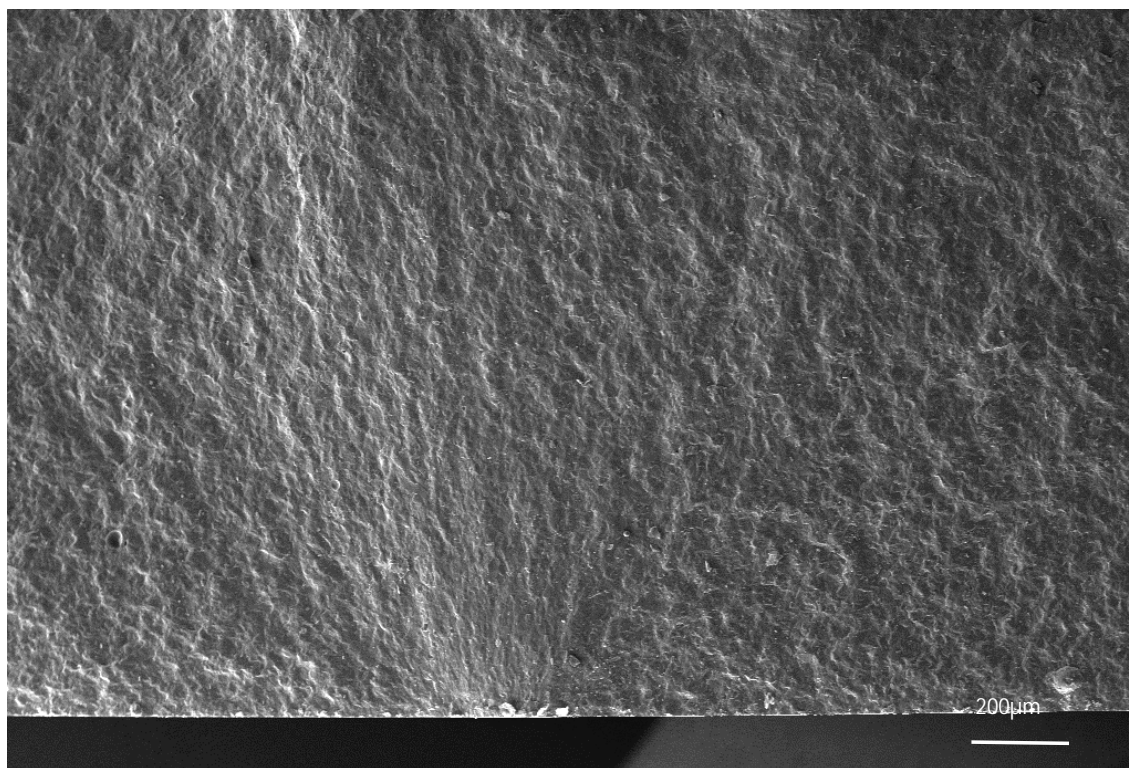

(b)

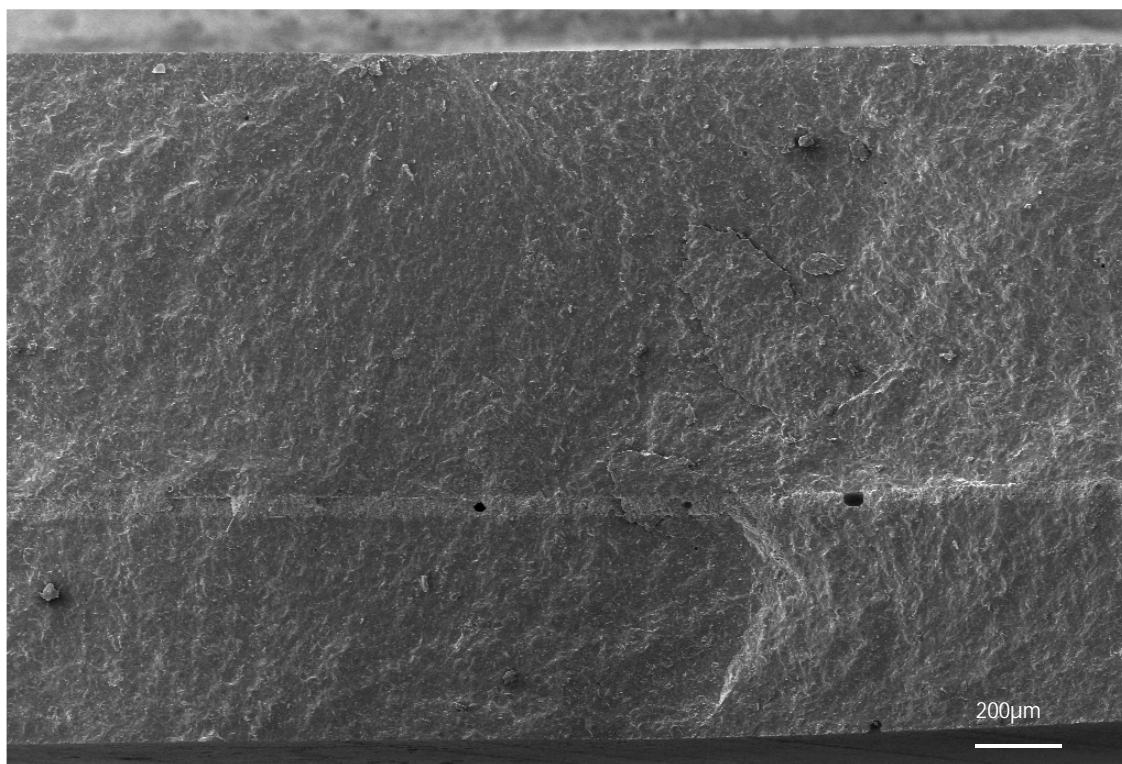

(c)

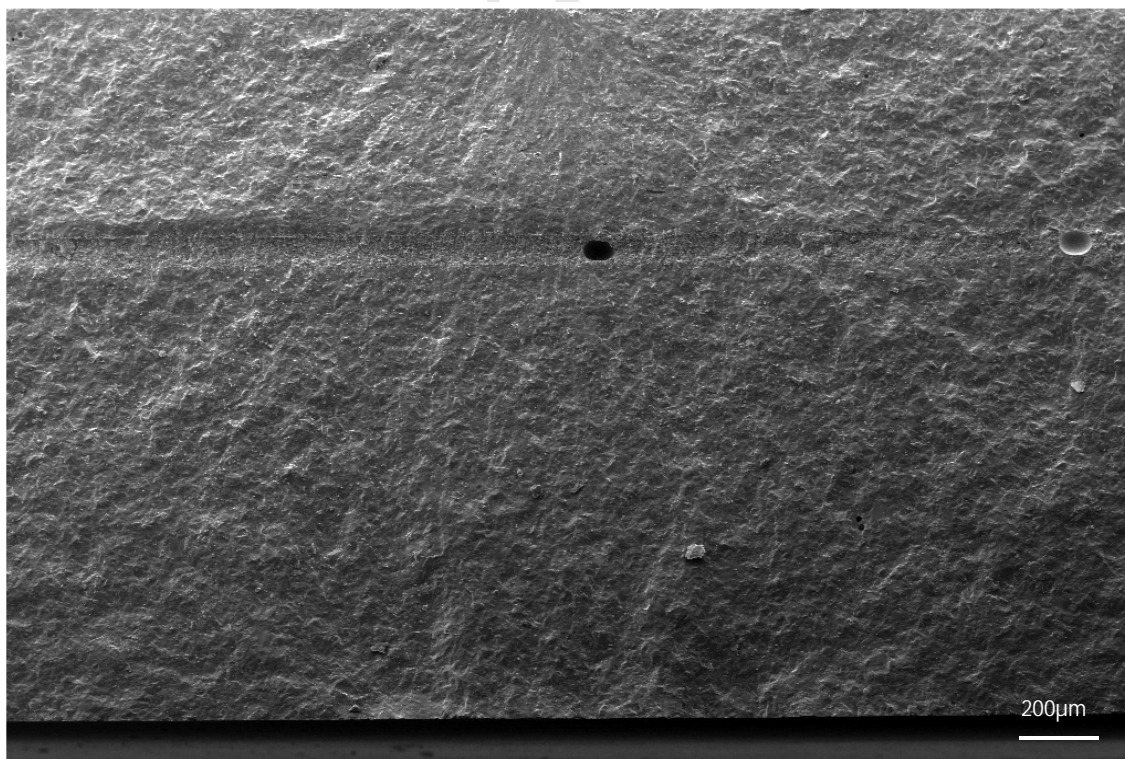

(d)



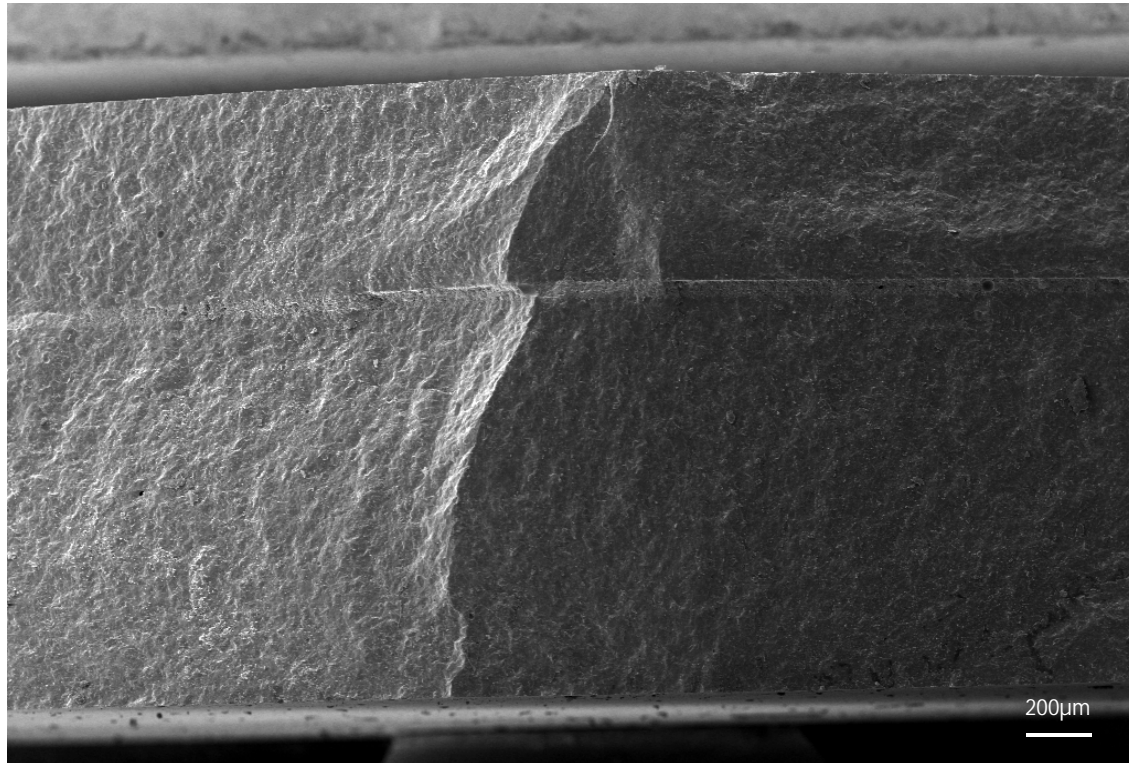


Figure 5. SEM images of the same regions of adhesively cemented ceramic laminates immediately following indentation (**5a,c**) and following 25,000 cycles of thermocycling and 30,000 cycles of cyclic loading (**5b,d**). The resin-interface was measured at between 10 and 30 μm in all micrographs, however the interface thickness demonstrated considerable regional variability in appearance. (**5a**) clearly demonstrates increased lengths of cracks parallel to the adhesive interfaces when compared with cracks in a normal direction. Crack extension in a normal direction to the adhesive interface appears to be arrested as the crack contacts the layer. Following thermo-mechanical fatigue crack extension occurred predominantly parallel to the interface (**5a,b**) and where cracks normal to the interface did extend there was evidence of a change in crack direction towards a more parallel path (**5c,d**).


(a)

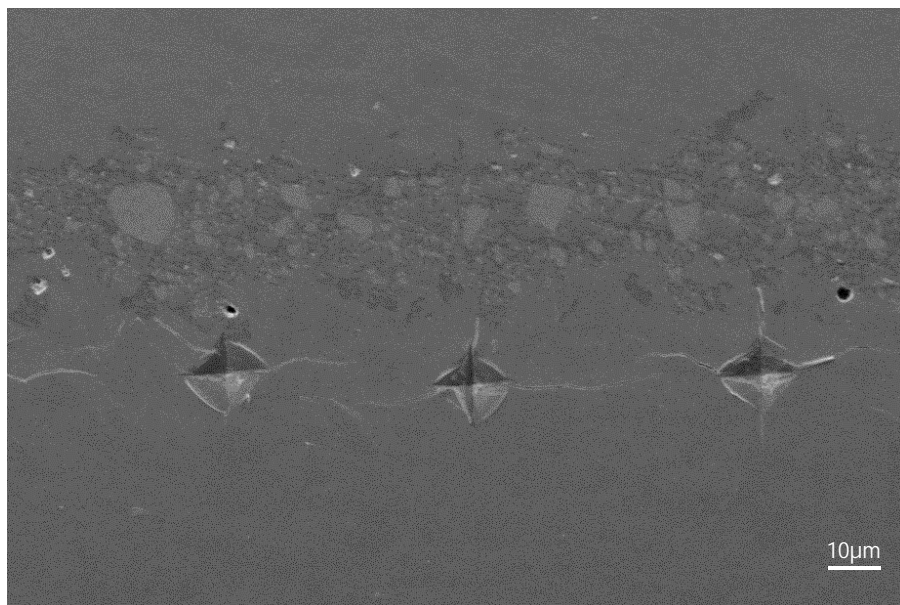

(b)

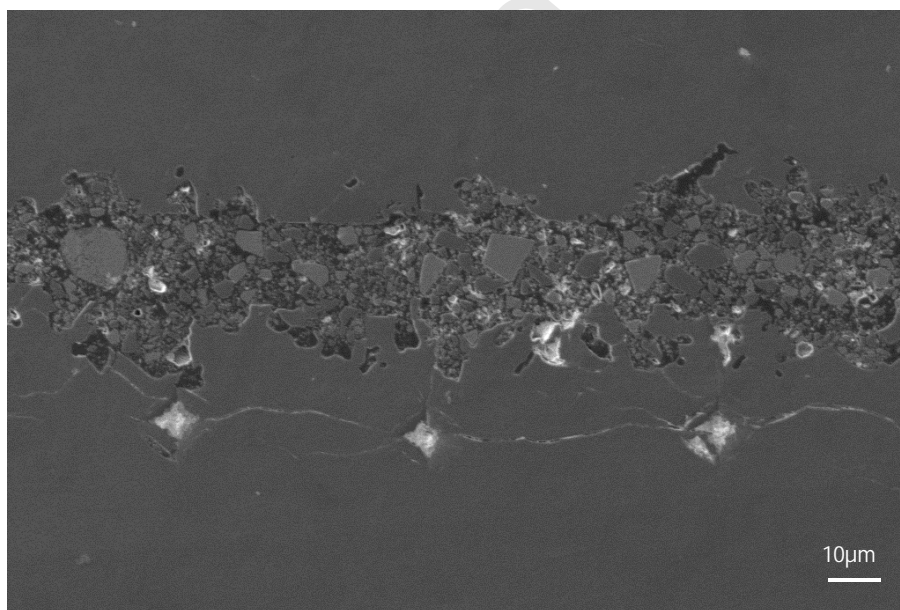

(c)

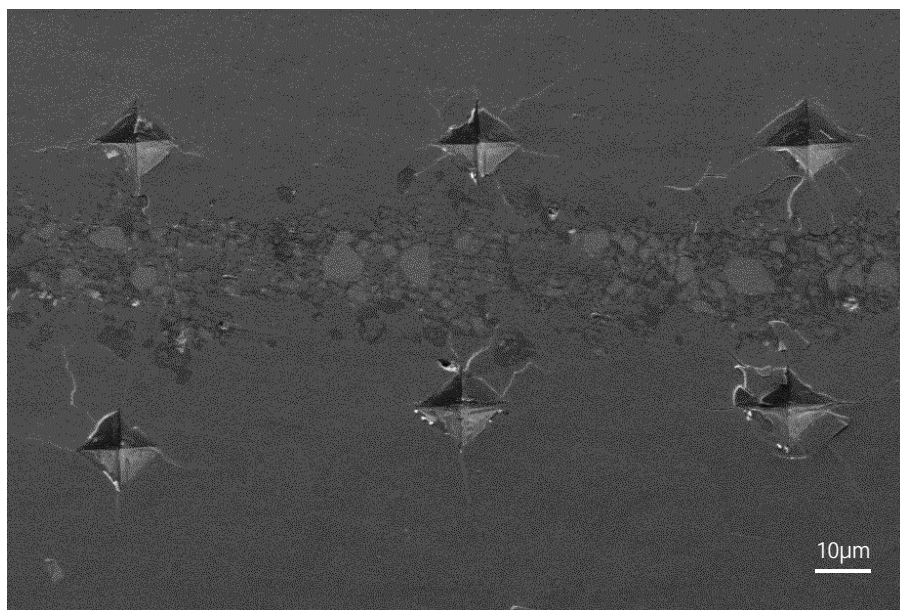

(d)


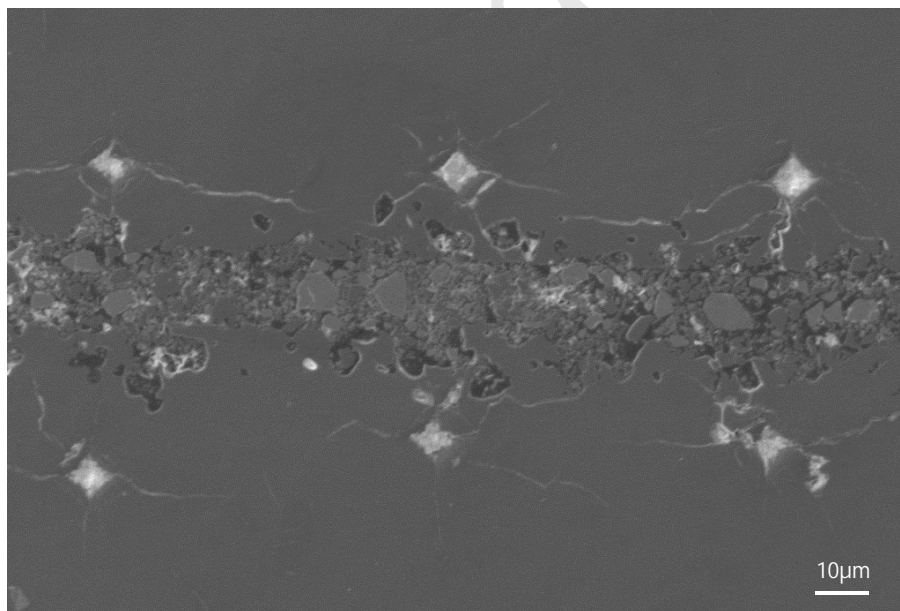


Figure 6. (a) Scanning electron micrograph of a simulated ‘concept’ multilayer ceramic laminate (1.5 mm thickness) fabricated from 4 layers of Vita Mark II feldspathic ceramic adhesively bonded with Panavia 21 tested in BFS with the lower surface in maximum tension. Although there is obvious porosity in the interlayer adhesive there is clear evidence of deflection of the crack direction at multiple levels, both radially and laterally (*). There is evidence of crack arrest (\square) and of Hertzian contact damage generated at the upper loaded surface (\blacktriangle). **(b)** Load-deflection curve demonstrates further reduction in effective stiffness of the structure following incorporation of 4 layers.

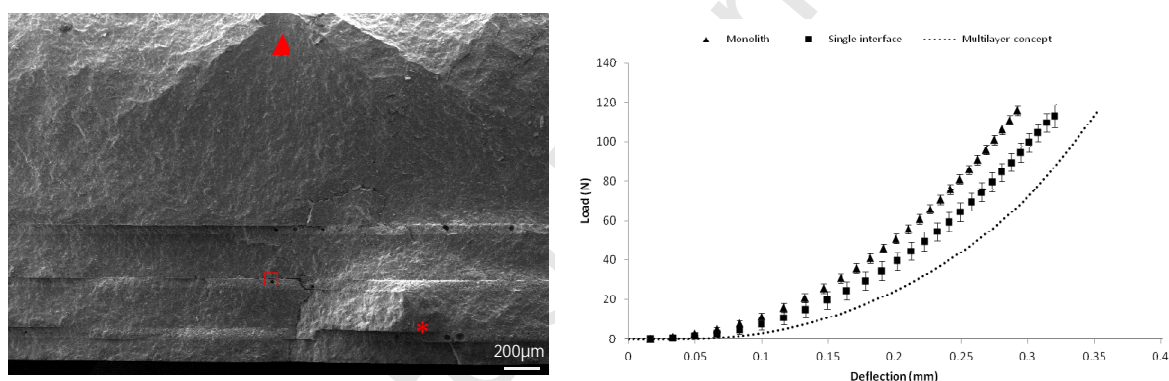

TABLE

Table 1. Mean BFS (standard deviations), and number of fracture fragments derived from BFS testing for monolithic specimens (Group A), specimens with the adhesive interface tested in tension (Group B) and specimens with an adhesive interface tested in compression (Group C).

Group	A			B			C		
Mean BFS and standard deviation (MPa)	116.6 (11.0) ^a			115.2 (10.7) ^a			105.06 (12.0) ^b		
BFS range (MPa)	127.0-197.2			118.9-185.0			110.0-171.1		
Number of fracture fragments	2	3	4	2	3	4	2	3	4
	4	13	3	9	11	0	10	10	0

ACKNOWLEDGMENT

Dr Anna Costa is supported by CAPES - Coordenação de Aperfeiçoamento de Pessoal de
Nível Superior (Grant No. 6244-13-0).

Accepted Manuscript